


# G+H Electrical Accessories

## Technical Datasheet



**Description:** Contour Polished Brass Unlacquered Light Switch  
(2 Gang/Brass Switches/White Inserts)

**Part Number:** CBUL202

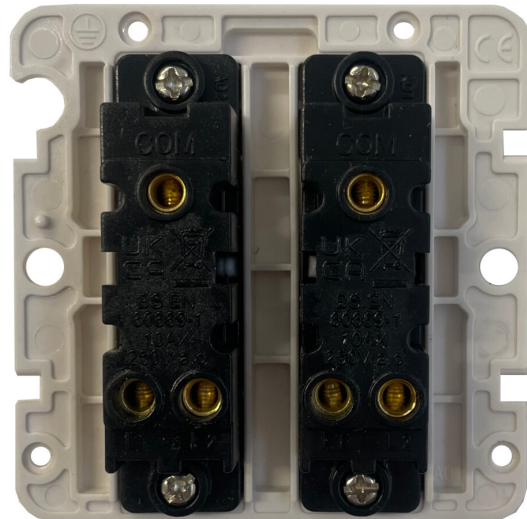

## Information

|                                |                                                                                                   |
|--------------------------------|---------------------------------------------------------------------------------------------------|
| <b>Plate Dimensions (mm)</b>   | 85 (W) x 85 (H) x 8 (D)                                                                           |
| <b>Insert Material</b>         | Polycarbonate                                                                                     |
| <b>Earth Strap</b>             | Mild Steel                                                                                        |
| <b>Operating Voltage(AC)</b>   | 250V @ 50Hz                                                                                       |
| <b>Termination Type</b>        | Screw                                                                                             |
| <b>Warranty</b>                | 10 years                                                                                          |
| <b>Product Class 1</b>         | Must be earthed                                                                                   |
| <b>Maintenance</b>             | Clean with a soft cloth only. Do not use a cleaning agent of any description.                     |
| <b>Please Note</b>             | Do not use masking tape on this product.                                                          |
| <b>Style</b>                   | Rounded Profile                                                                                   |
| <b>Plate Material</b>          | Solid Brass, Hand-finished, Lacquered                                                             |
| <b>Switch Material</b>         | Metal                                                                                             |
| <b>Required back box depth</b> | 16mm                                                                                              |
| <b>Load Rating</b>             | 10A                                                                                               |
| <b>Switch type</b>             | Single pole, 2 way                                                                                |
| <b>Terminal Capacity</b>       | 4 x 1.0mm <sup>2</sup> , 4 x 1.5mm <sup>2</sup> , 2 x 2.5mm <sup>2</sup> , 1 x 4.0mm <sup>2</sup> |
| <b>Standards</b>               | BS EN 60669-1                                                                                     |
| <b>IP Rating</b>               | IP2XD                                                                                             |