
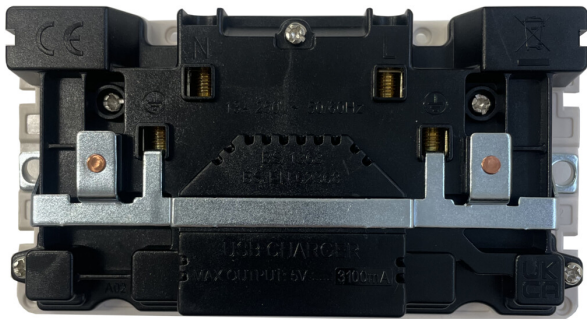


Technical Datasheet

Description: Spectrum Light Grey Double Socket with USB (USB-A and USB-C/White Switches)

Part Number: SLG911W

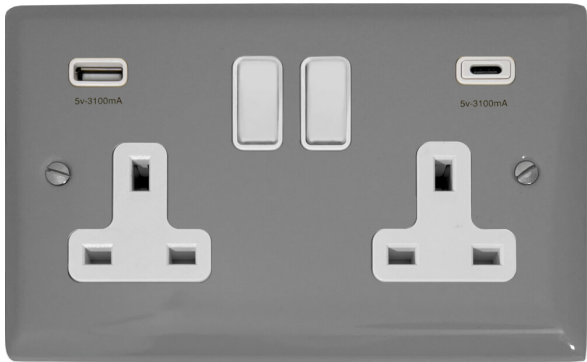

Information

|                         |                                                                               |
|-------------------------|-------------------------------------------------------------------------------|
| Plate Dimensions (mm)   | 153 (W) x 95 (H) x 8 (D)                                                      |
| Insert Material         | Polycarbonate                                                                 |
| Earth Strap             | Mild Steel                                                                    |
| Operating Voltage(AC)   | 250V @ 50Hz                                                                   |
| Termination Type        | Screw                                                                         |
| Warranty                | 10 years                                                                      |
| Product Class 1         | Must be earthed                                                               |
| Maintenance             | Clean with a soft cloth only. Do not use a cleaning agent of any description. |
| Please Note             | Do not use masking tape on this product.                                      |
| Style                   | Sloped Profile                                                                |
| Plate Material          | Mild Steel, Powder Coated                                                     |
| Switch Material         | Polycarbonate                                                                 |
| Required back box depth | 25mm                                                                          |
| Load Rating             | 13A                                                                           |
| Switch type             | Single Pole                                                                   |
| Terminal Capacity       | 3x 2.5mm², 3x 4.0mm², 2x 6.0mm²                                               |
| Standards               | BS 1363, BS EN 62368                                                          |
| IP Rating               | IP2XD                                                                         |