


**Description:** Flat Satin Chrome Light Switch (2 Gang/Black Insert/Satin Chrome Switches)

**Part Number:** FSC302

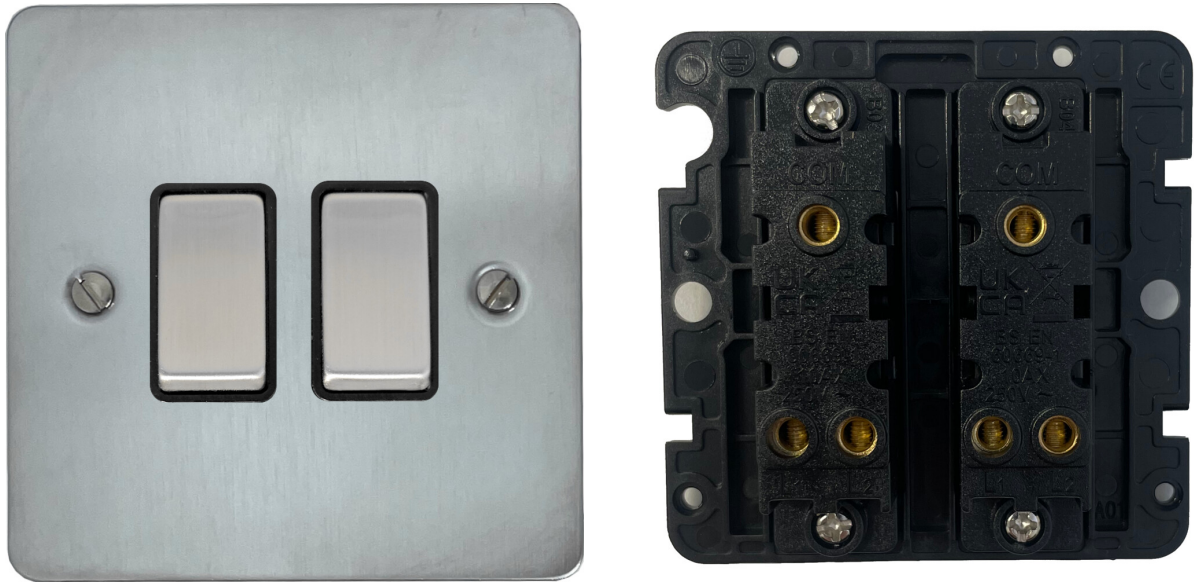

Information

|                         |                                                                               |
|-------------------------|-------------------------------------------------------------------------------|
| Plate Dimensions (mm)   | 86 (W) x 86 (H) x 2 (D)                                                       |
| Insert Material         | Polycarbonate                                                                 |
| Earth Strap             | Mild Steel                                                                    |
| Operating Voltage(AC)   | 250V @ 50Hz                                                                   |
| Termination Type        | Screw                                                                         |
| Warranty                | 10 years                                                                      |
| Product Class 1         | Must be earthed                                                               |
| Maintenance             | Clean with a soft cloth only. Do not use a cleaning agent of any description. |
| Please Note             | Do not use masking tape on this product.                                      |
| Style                   | Flat Profile                                                                  |
| Plate Material          | Chrome Plated Solid Brass, Hand-finished, Lacquered                           |
| Switch Material         | Metal                                                                         |
| Required back box depth | 25mm                                                                          |
| Load Rating             | 10A                                                                           |
| Switch type             | Single pole, 2 way                                                            |
| Terminal Capacity       | 4 x 1.0mm², 4 x 1.5mm² ,2 x 2.5mm² , 1 x 4.0mm²                               |
| Standards               | BS EN 60669-1                                                                 |
| IP Rating               | IP2XD                                                                         |